

Figure 1

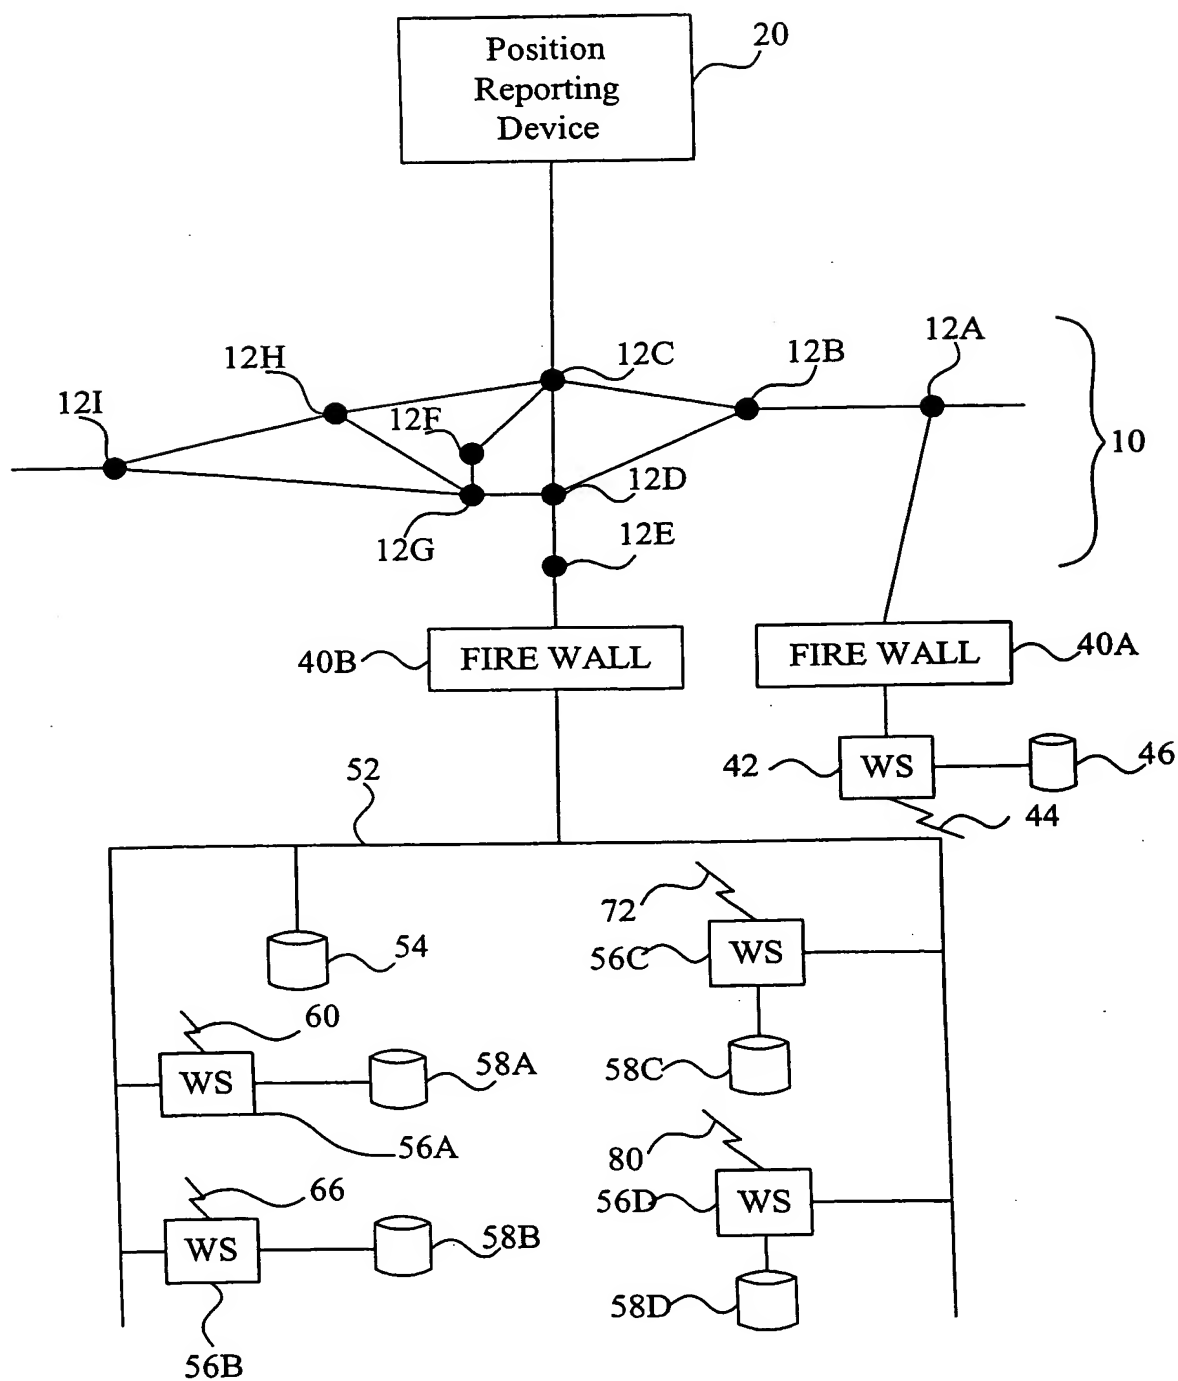


Figure 2

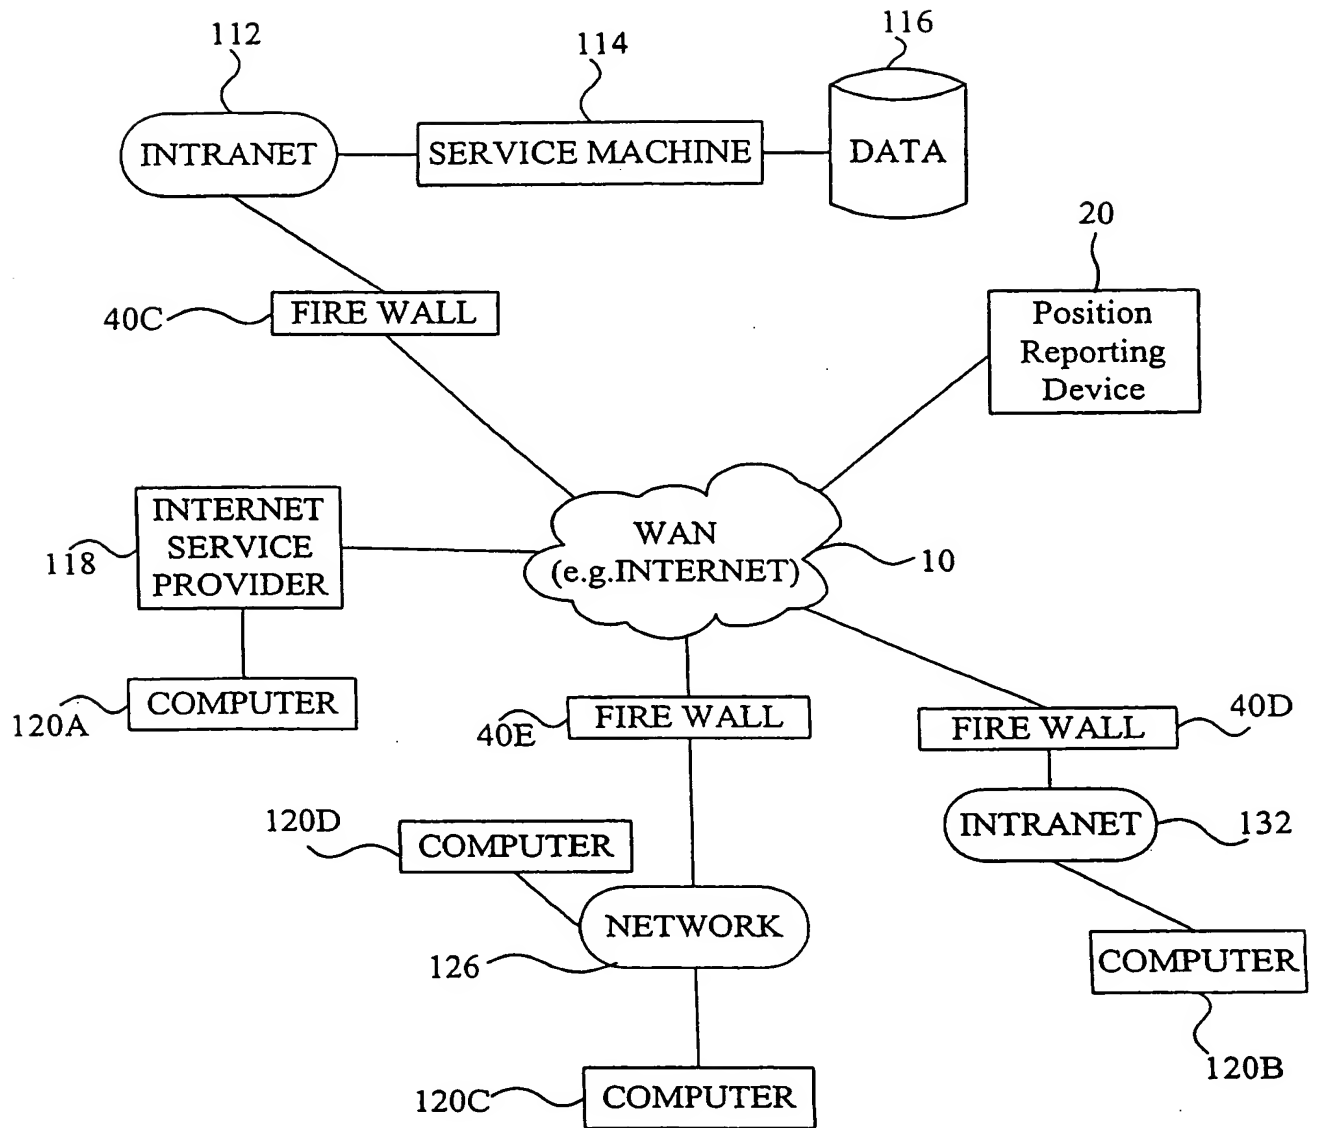


Figure 3

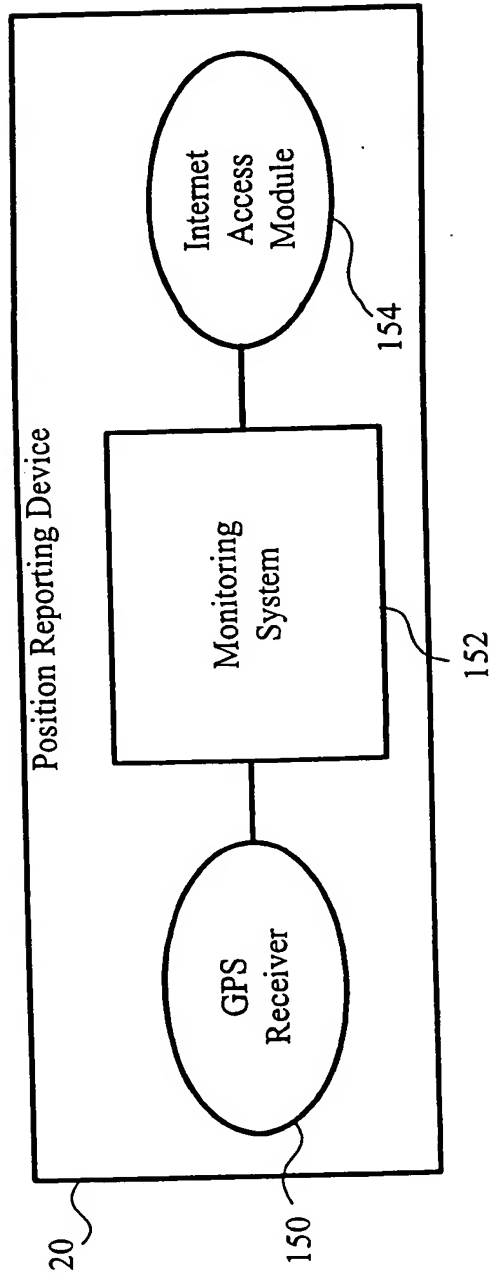


Figure 4

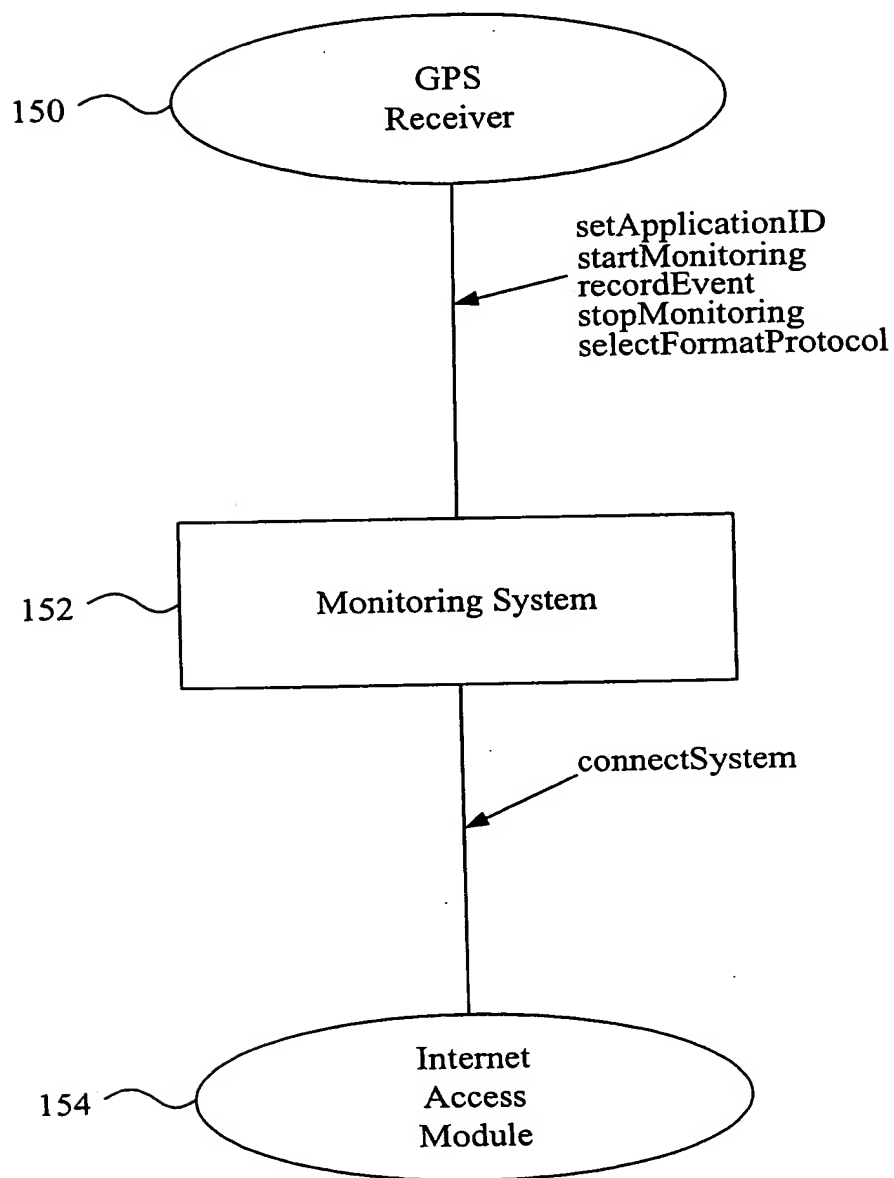


Figure 5

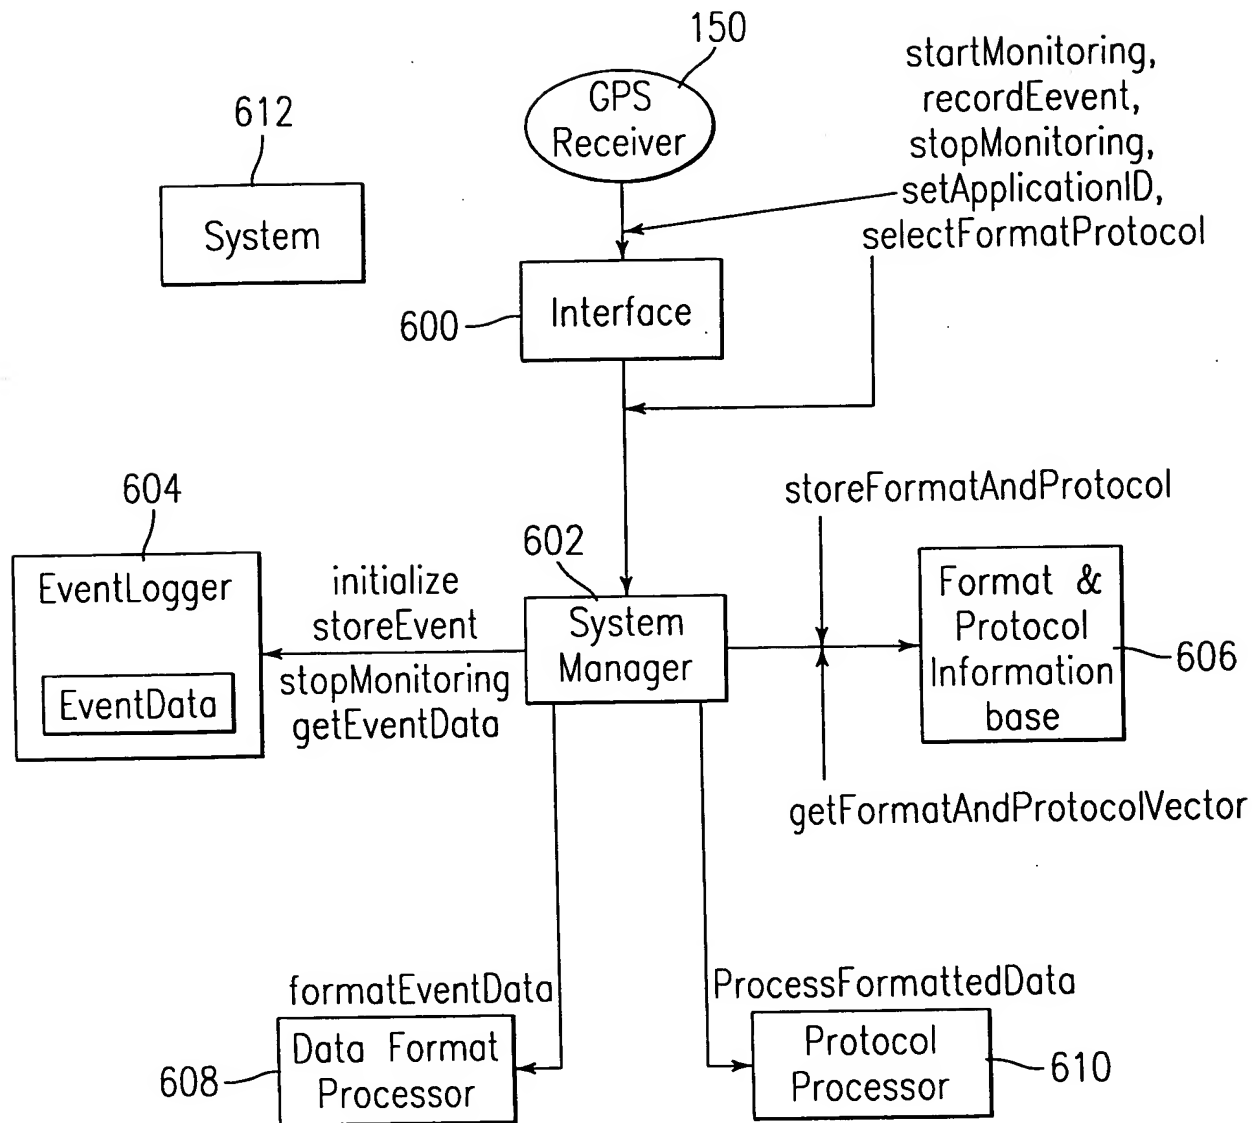


FIG. 6A

| Return Value | Function Name | Description |
|-----------------------------|-----------------------|--|
| bool | getNextSession | Return false when there is no more session; true otherwise |
| string | getFileNames | Returns file names for the EventData |
| map<string,string> | getSessionInformation | Returns the map. Keys are UserID, ApplicationID, CumulativeSessionNumber, StartTime, and Duration. |
| map<string, vector<string>> | getSessionEventData | Returns the map. Keys are EventName and EventTiming. The values of EventTiming vector are in the unit of 10th of a second converted from unsigned integer to string. |

FIG. 6B

| Return Value | Function Name | Description |
|--------------|-----------------------|---|
| bool | getNextLine | Returns one line of string data as an out parameter string. The function returns true if there is a line; false if no more line exists with empty string. |
| string | getFileNameWithSuffix | returns file name for the data with suffix if applicable |

FIG. 6C

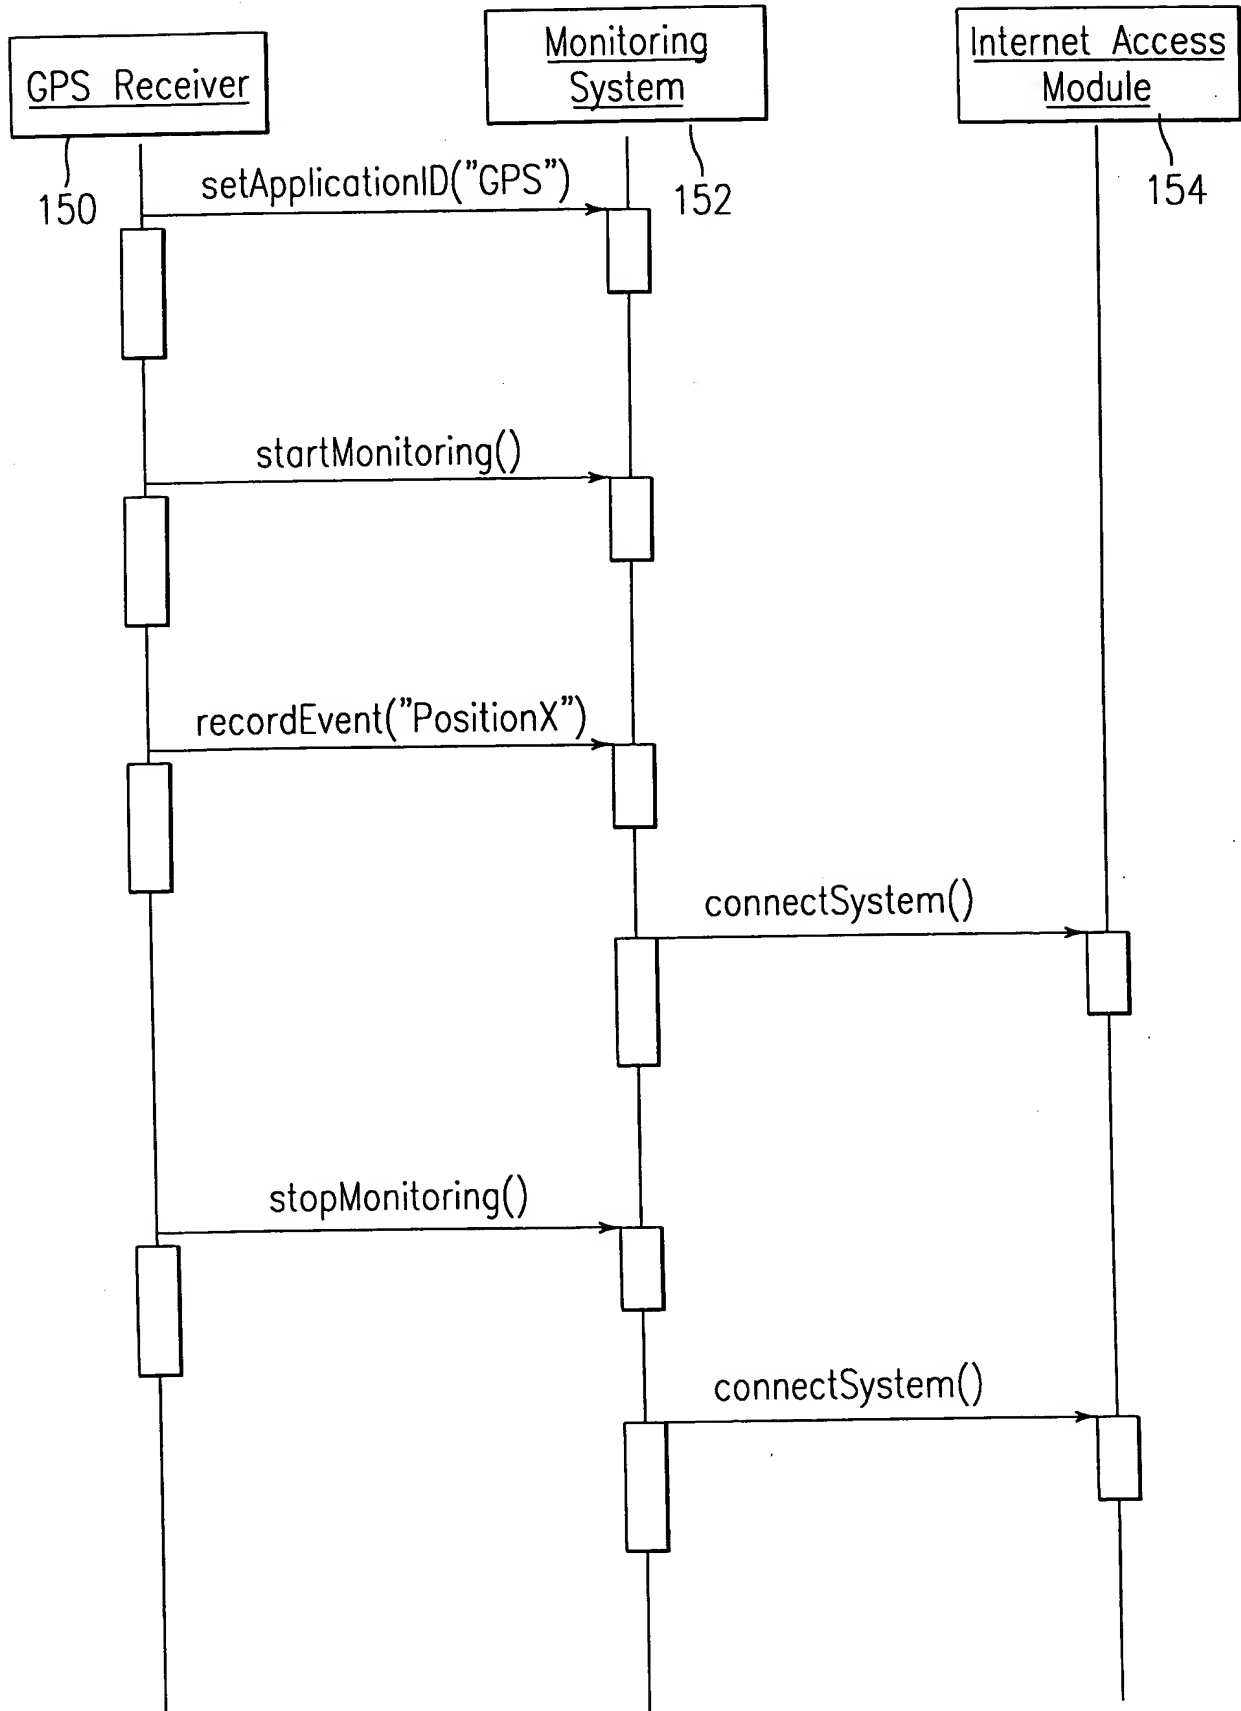


FIG. 7

FIG. 8

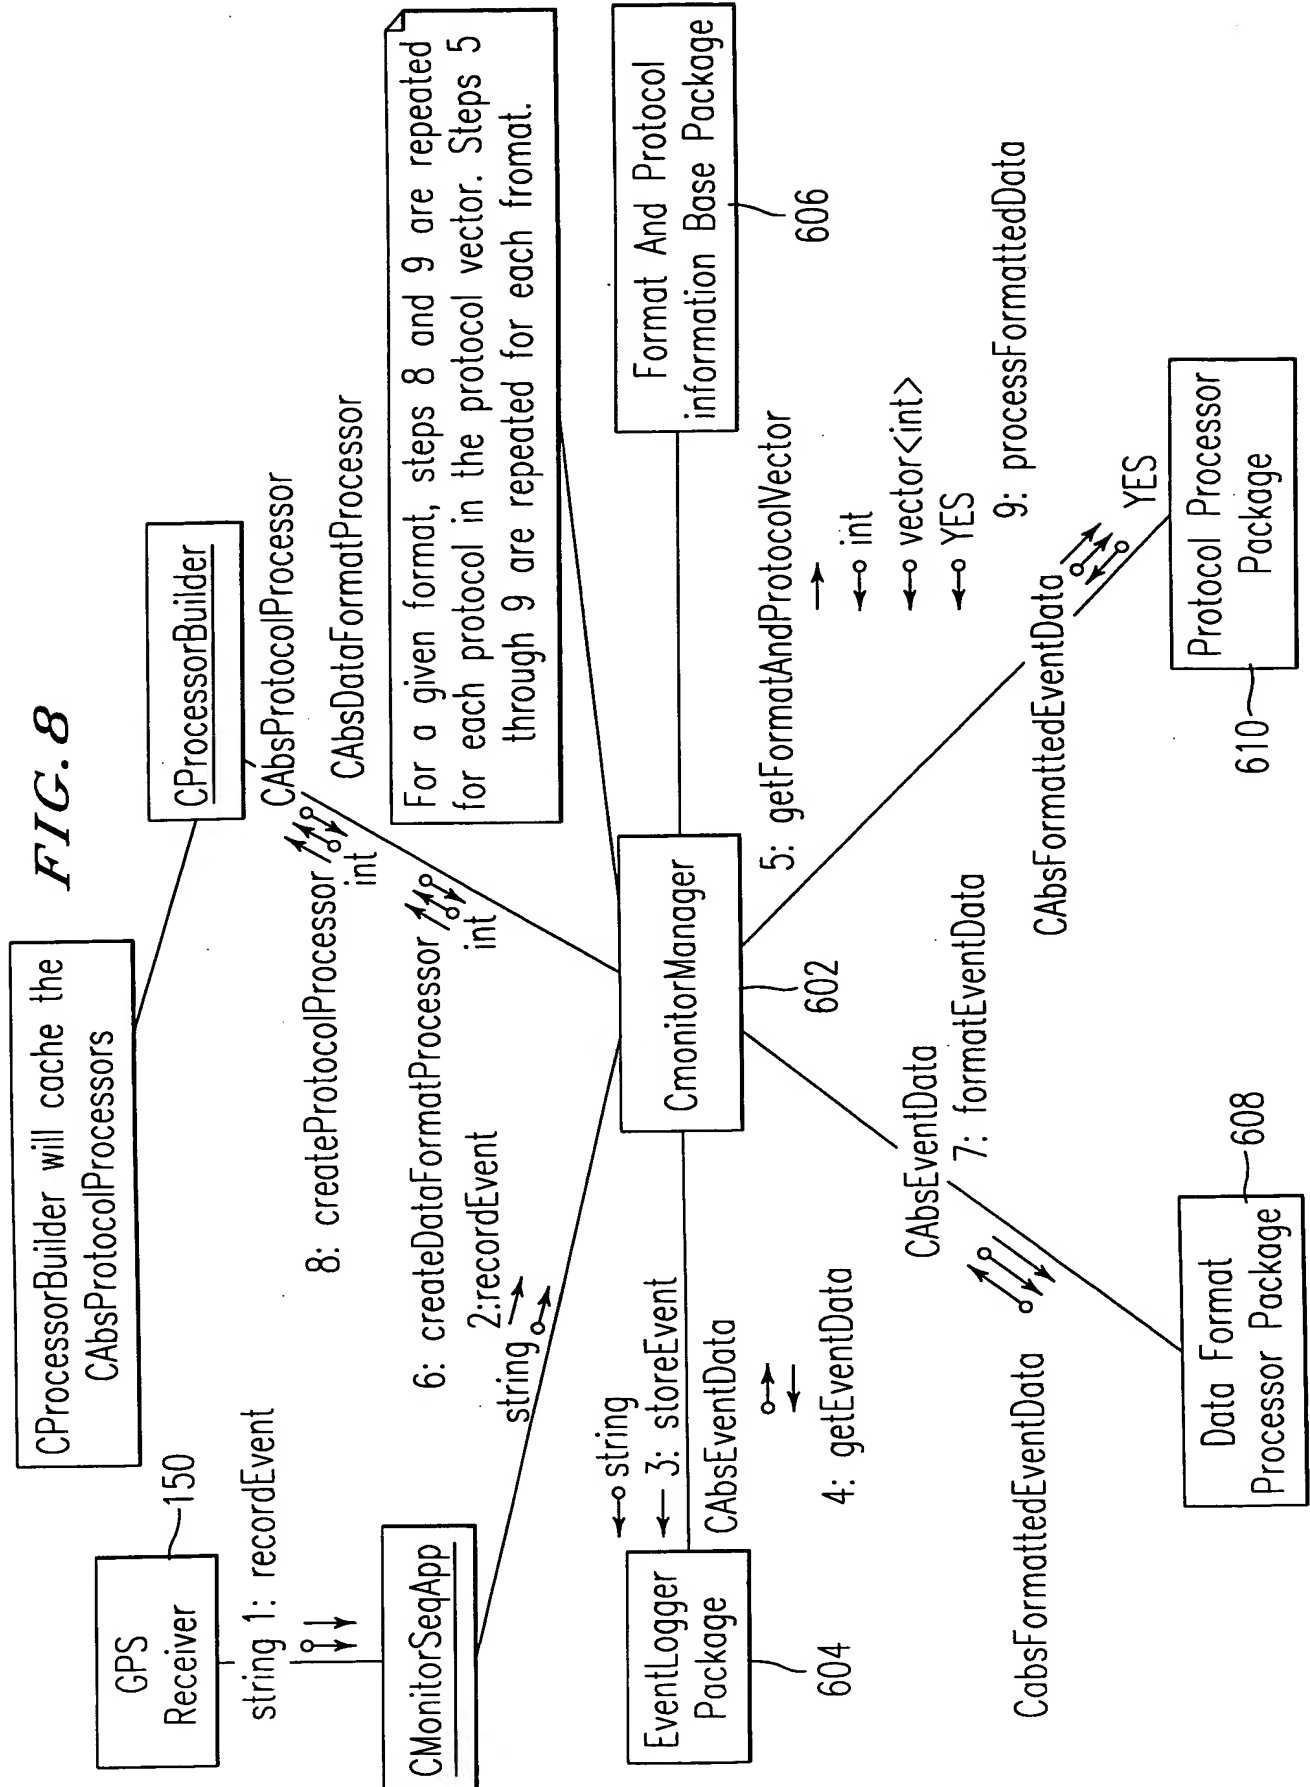
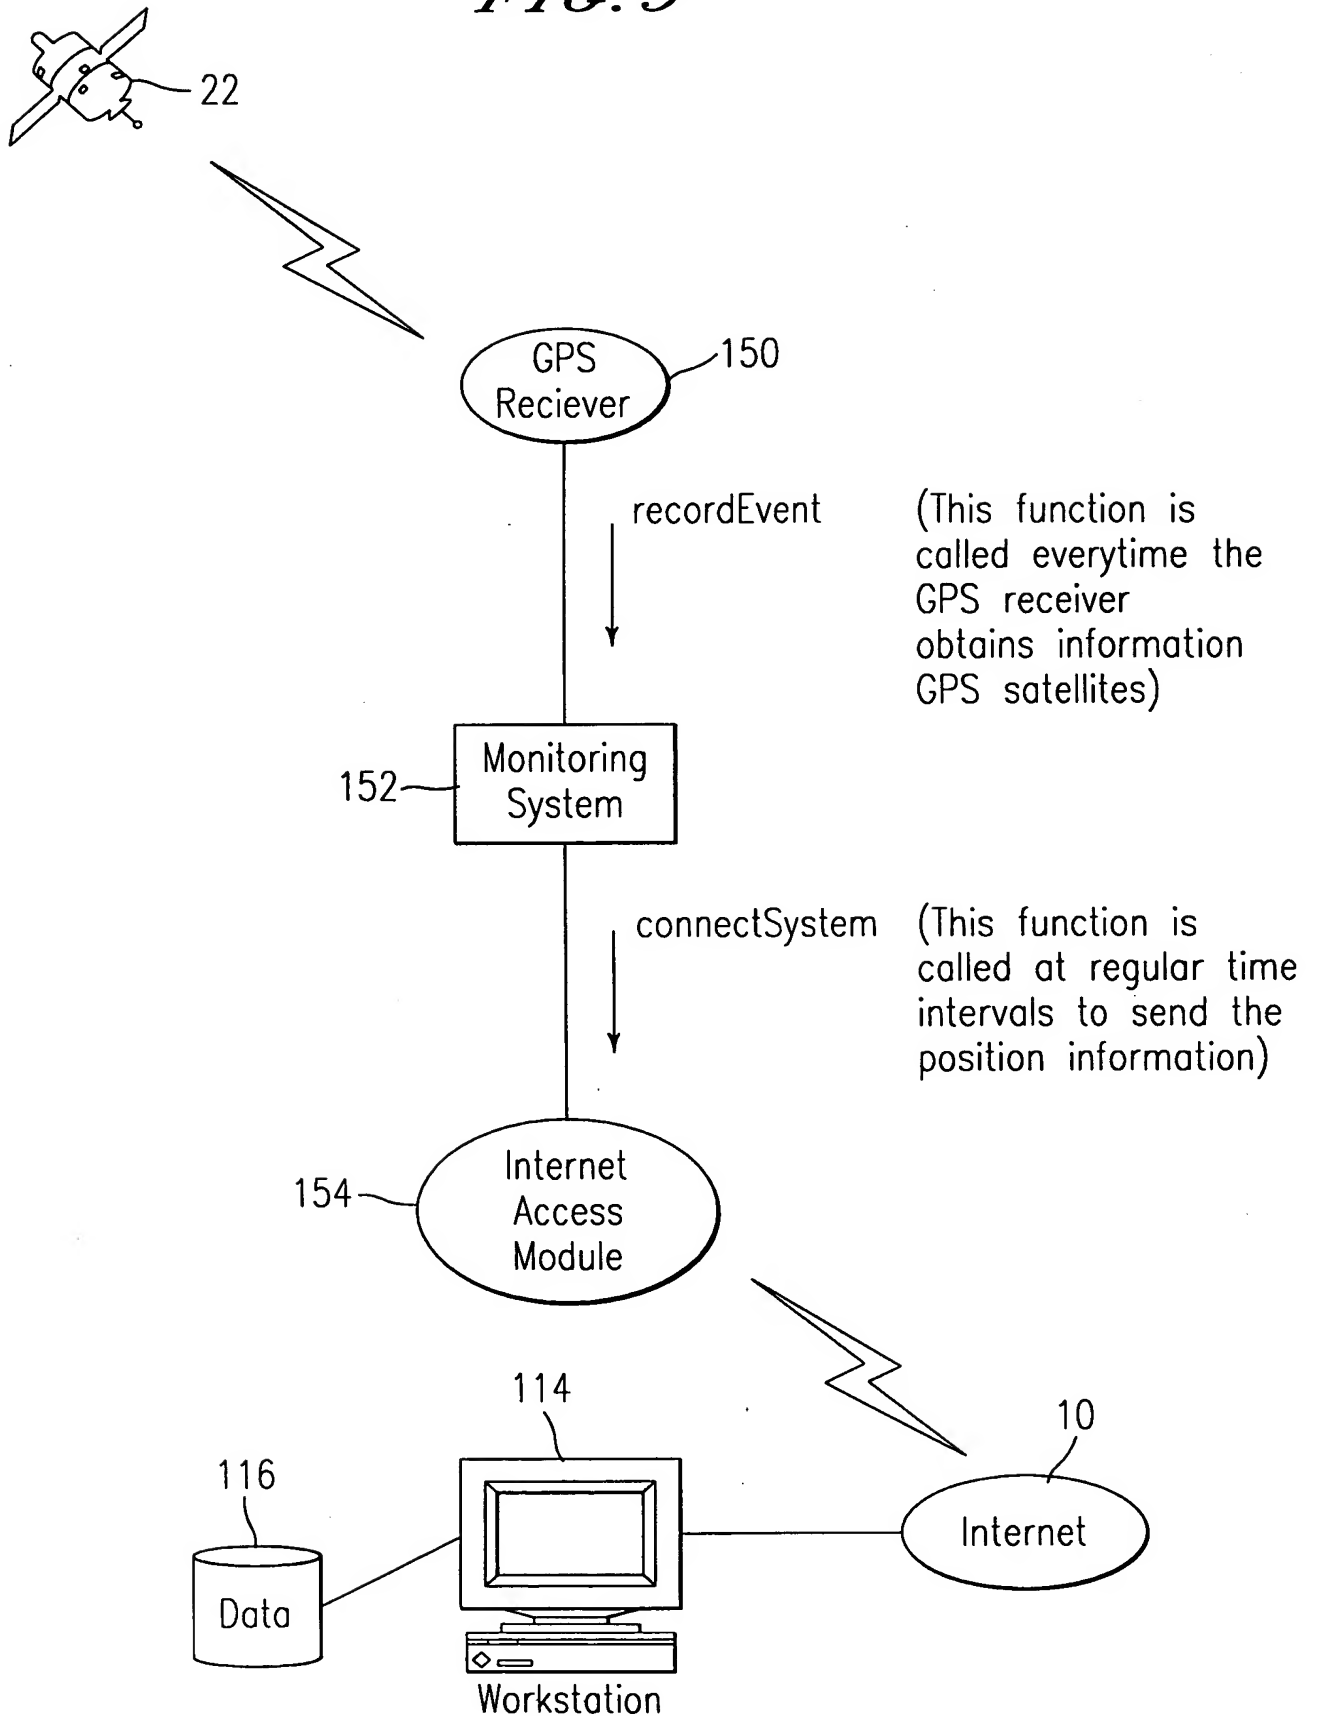


FIG. 9



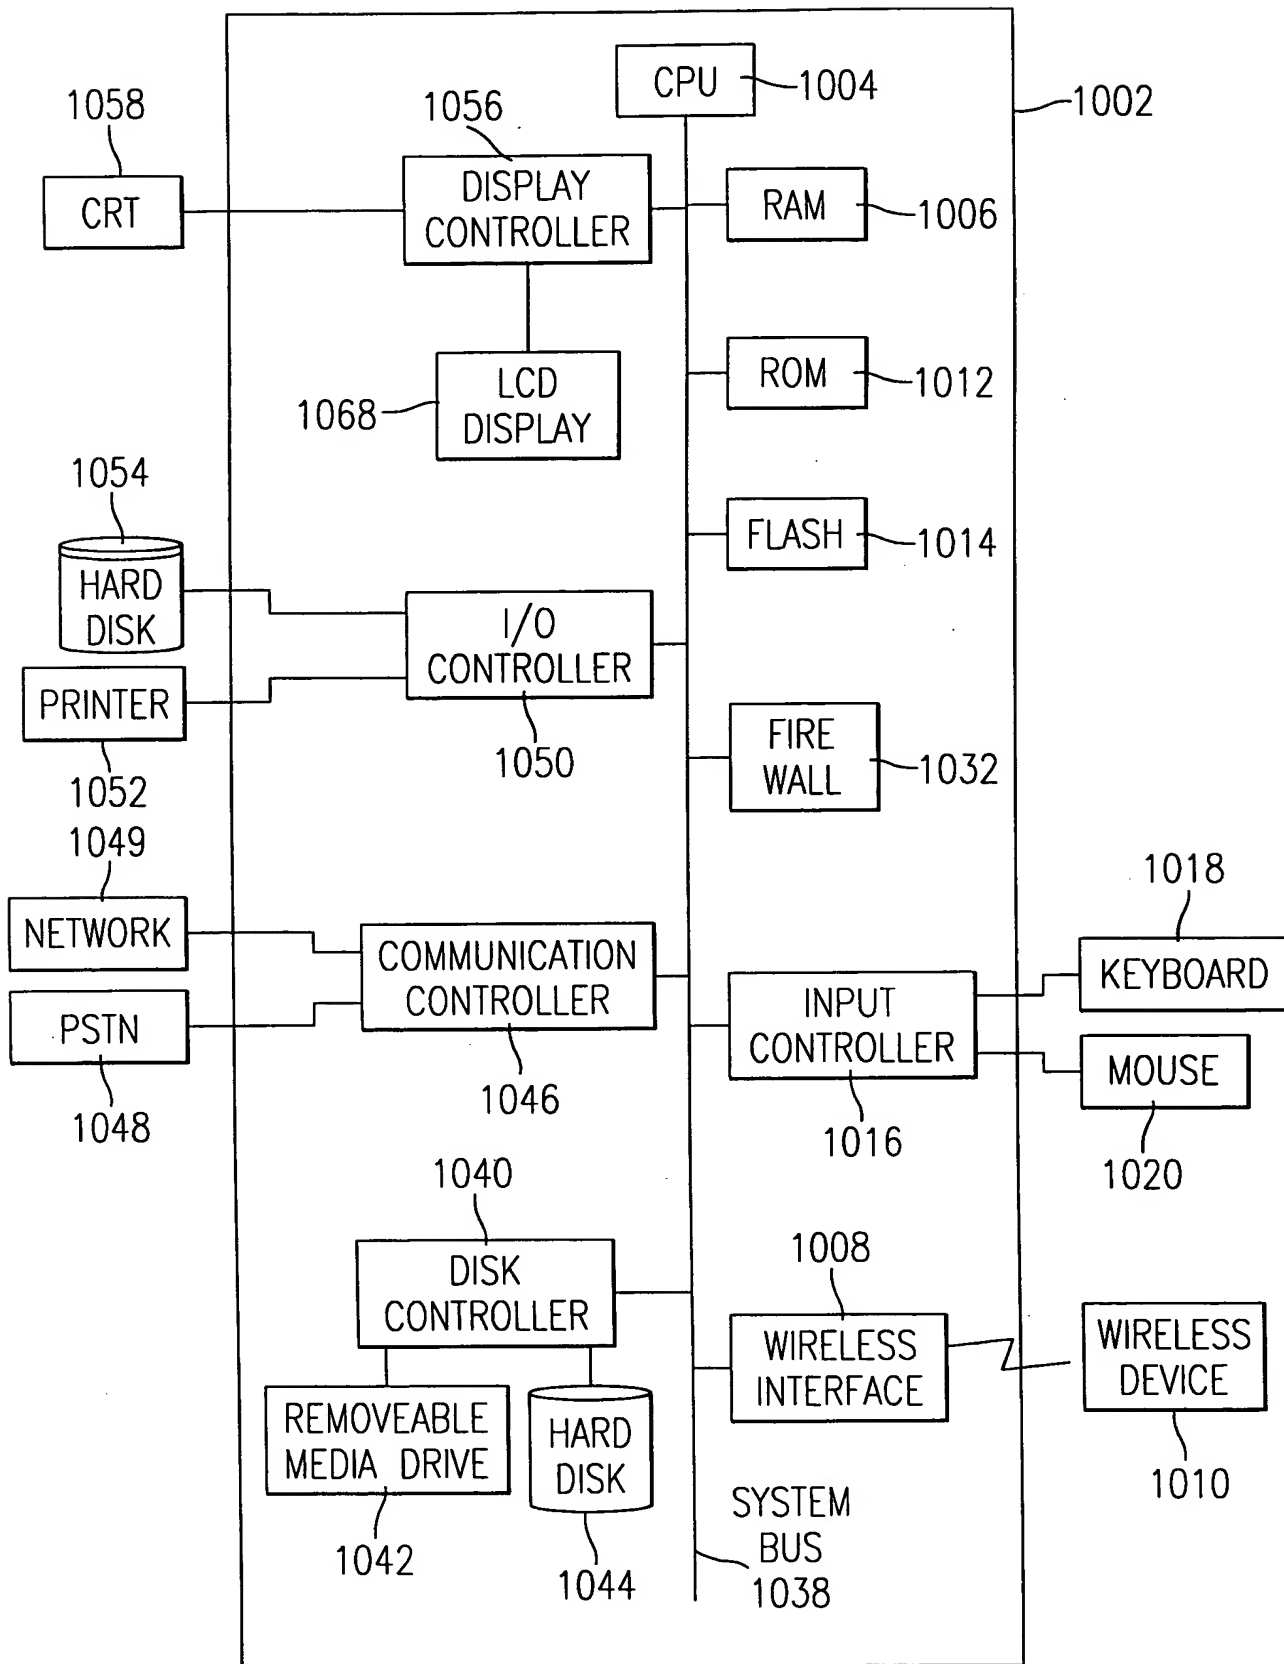


FIG. 10